


# DATA SHEET

## AMC3 & AMC3-1

### ALUMINIUM MAINS CONNECTOR

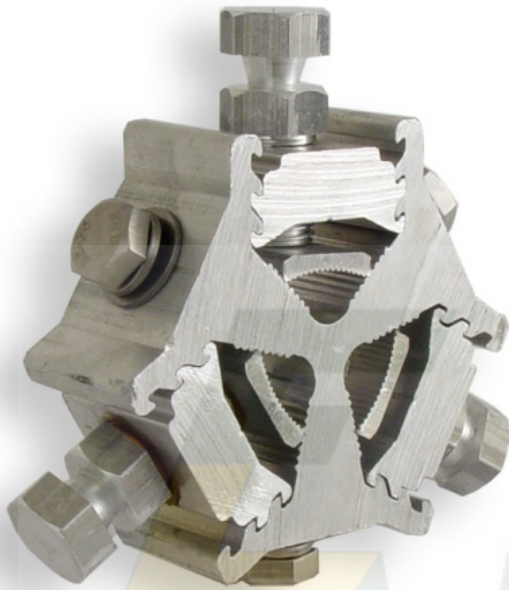

<b>DESCRIPTION</b>	THREE WAY ALUMINIUM MAINS CONNECTOR (50-120 & 120-240mm <sup>2</sup> )
<b>SIZE (mm)</b>	92L x 93H x 30W
<b>COLOUR</b>	ALUMINIUM
<b>WEIGHT</b>	0.280 kg

**MATERIAL:** ALUMINIUM

**HARDWARE:** STAINLESS STEEL - GRADE 304

**TESTING:**

**SALES DRAWING No:** 1-S0073

**NOTE:** Grooves in the main body ensure good electrical contact when the shear bolts are tensioned to their breaking capacity. Pressure Pads are grooved and are attached to the shear bolt to ensure they are not lost. Dropper wires are provided if required, from connection points in three (3) places around the main body for service take-offs to feed consumer supply. The PVC SHR4 Shroud has been designed to fit the Mains Connector to ensure insulation between the phase cables.  
**AMC3** designed to suit sector cable 120-240mm<sup>2</sup>  
**AMC3-1** designed to suit sector cable 50-120mm<sup>2</sup>