


## DATA SHEET

### CAR- 'XXX'

#### CROSS ARM ROLLER

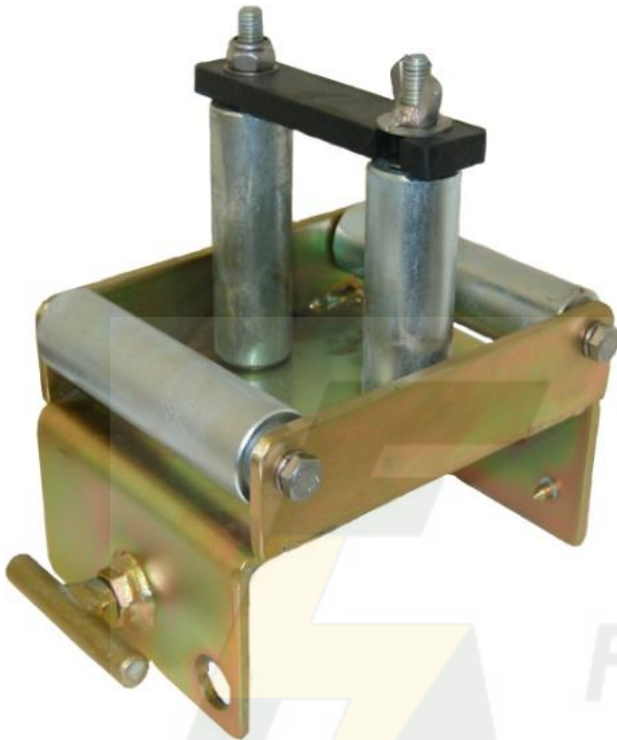

<b>DESCRIPTION</b>	CROSS ARM ROLLER
<b>SIZE (mm)</b>	140W x 204H x 145/170L
<b>COLOUR</b>	ZINC PLATED STEEL
<b>WEIGHT</b>	5kg

**MATERIAL:** BODY: MILD STEEL ZINC PLATED – UPLIFT GATE: BLACK NYLON –  
 ROLLERS: MILD STEEL ZINC PLATED

**HARDWARE:** STAINLESS STEEL - GRADE 304

**TESTING:**

**SALES DRAWING No:** 3-S0002

**NOTE:** Suited for stringing all aluminium SCA and copper conductors. Rollers can be provided in aluminium or zinc plated mild steel. Roller bearings on horizontal rollers can be provided as an alternative to steel shaft. A nylon gate is provided to prevent uplift of conductors during stringing. When stringing long spans of conductor, 2 horizontal rollers on the incoming side can be provided to prevent damage to the conductor - The angle of the rollers is approximately 18°. Available to suit 100,125 & 150mm cross arms.

Can also have two (2) horizontal rollers on the outgoing side - CAR-100/4H.